



**ADVANCED**  
**General Certificate of Education**  
**2017**

---

**Mathematics**  
**Assessment Unit M3**  
*assessing*  
**Module M3: Mechanics 3**  
**[AMM31]**

**TUESDAY 20 JUNE, AFTERNOON**

---

**MARK  
SCHEME**

## **Introduction**

The mark scheme normally provides the most popular solution to each question. Other solutions given by candidates are evaluated and credit given as appropriate; these alternative methods are not usually illustrated in the published mark scheme.

The marks awarded for each question are shown in the right hand column and they are prefixed by the letters **M**, **W** and **MW** as appropriate. The key to the mark scheme is given below:

**M** indicates marks for correct method.

**W** indicates marks for working.

**MW** indicates marks for combined method and working.

The solution to a question gains marks for correct method and marks for an accurate working based on this method. Where the method is not correct no marks can be given.

A later part of a question may require a candidate to use an answer obtained from an earlier part of the same question. A candidate who gets the wrong answer to the earlier part and goes on to the later part is naturally unaware that the wrong data is being used and is actually undertaking the solution of a parallel problem from the point at which the error occurred. If such a candidate continues to apply correct method, then the candidate's individual working must be followed through from the error. If no further errors are made, then the candidate is penalised only for the initial error. Solutions containing two or more working or transcription errors are treated in the same way. This process is usually referred to as "follow-through marking" and allows a candidate to gain credit for that part of a solution which follows a working or transcription error.

### **Positive marking:**

It is our intention to reward candidates for any demonstration of relevant knowledge, skills or understanding. For this reason we adopt a policy of **following through** their answers, that is, having penalised a candidate for an error, we mark the succeeding parts of the question using the candidate's value or answers and award marks accordingly.


Some common examples of this occur in the following cases:

- (a) a numerical error in one entry in a table of values might lead to several answers being incorrect but these might not be essentially separate errors;
- (b) readings taken from candidates' inaccurate graphs may not agree with the answers expected but might be consistent with the graphs drawn.

When the candidate misreads a question in such a way as to make the question easier only a proportion of the marks will be available (based on the professional judgement of the examining team).

1 (i)

AVAILABLE MARKS

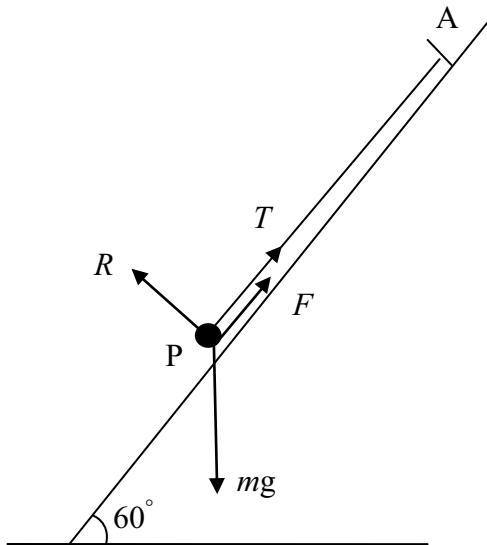

M2

$$\text{(ii)} \quad \leftarrow : R = mg\cos 60^\circ = \frac{mg}{2}$$

M1 W1

$$F = \mu R = \frac{\mu mg}{2}$$

MW1

$$\text{Hooke's Law: } T = \frac{\lambda x}{l} = \frac{2mg\sqrt{3}}{3} \times \frac{0.2}{0.4} = \frac{mg\sqrt{3}}{3}$$

M1 W1

$$\nearrow : T + F = mg\sin 60^\circ$$

M1 W1

$$\frac{mg\sqrt{3}}{3} + \frac{\mu mg}{2} = \frac{mg\sqrt{3}}{2}$$

$$\frac{\mu mg}{2} = \frac{mg\sqrt{3}}{6}$$

$$\mu = \frac{\sqrt{3}}{3}$$

W1

10

2 (i) We need  $\mathbf{F} = s(\mathbf{AB})$  M1

$$(\alpha + \beta)\mathbf{i} + (2 + 3\alpha)\mathbf{j} + (-3 + 2\beta)\mathbf{k} = s[(8 - 2)\mathbf{i} + (-2 - 1)\mathbf{j} + (15 - 6)\mathbf{k}]$$

$$= s(6\mathbf{i} - 3\mathbf{j} + 9\mathbf{k})$$

MW1

$$\alpha + \beta = 6s \quad (1)$$

$$2 + 3\alpha = -3s \quad (2)$$

$$-3 + 2\beta = 9s \quad (3)$$

M1 W1

$$(1) \times 2 : 2\alpha + 2\beta = 12s$$

M1

$$-(3) : 3 - 2\beta = -9s$$

$$2\alpha + 3 = 3s$$

$$(2) 2 + 3\alpha = -3s$$

$$5\alpha + 5 = 0$$

$$\alpha = -1$$

$$(2) 2 - 3 = -3s$$

$$s = \frac{1}{3}$$

$$(1) -1 + \beta = 2$$

$$\beta = 3$$

W2

(ii)  $\mathbf{F} = (2\mathbf{i} - \mathbf{j} + 3\mathbf{k}); \mathbf{AB} = (6\mathbf{i} - 3\mathbf{j} + 9\mathbf{k})$

$$\text{Work done} = \mathbf{F} \cdot \mathbf{AB} = (2\mathbf{i} - \mathbf{j} + 3\mathbf{k}) \cdot (6\mathbf{i} - 3\mathbf{j} + 9\mathbf{k}) \quad \text{M1}$$

$$= 12 + 3 + 27 = 42 \text{ J} \quad \text{W1}$$

(iii) Work done = change in KE


$$42 = \frac{mv^2}{2} - 0 = \frac{7v^2}{6} \quad \text{M1}$$

$$v = 6 \text{ ms}^{-1} \quad \text{W1}$$

11

AVAILABLE  
MARKS

3

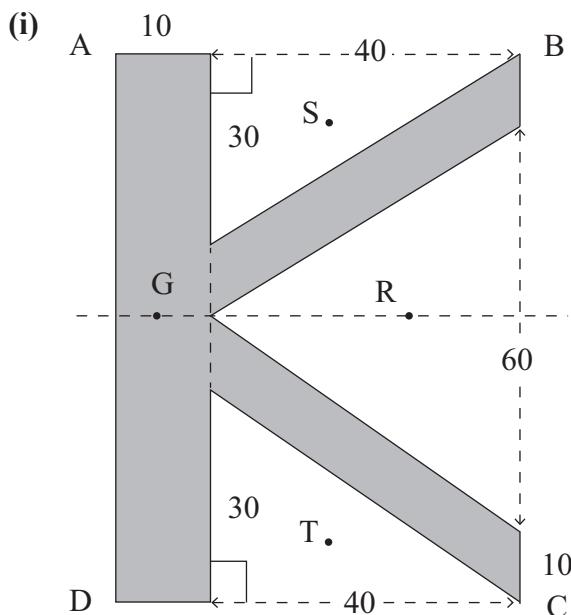

AVAILABLE MARKS

Let  $m$  be the mass per unit area, in  $\text{kg cm}^{-2}$ , of the sheet metal

$$\text{Mass of rectangle } ABDC = 80 \times 50 \times m = 4000m \quad \text{M1}$$

$$\text{Each } 40 \times 30 \text{ triangle has mass } 600m \quad \text{W1}$$

Measuring horizontally from AD

$$S \text{ is } 10 + \frac{40}{3} = \frac{70}{3} \text{ cm from AD}$$

$$T \text{ is } \frac{70}{3} \text{ cm from AD}$$

$$R \text{ is } 50 - \frac{40}{3} \text{ cm from AD}$$

$$G \text{ is } x \text{ cm from AD} \quad \text{MW2}$$

Taking moments about AD: M1

$$(4000m - 4 \times 600m) \times x + 2 \times 600m \times \frac{70}{3} + 2 \times 600m \times \frac{110}{3} = 4000m \times 25 \quad \text{W1}$$

$$1600mx + 28000m + 44000m = 100000m$$

$$1600x = 28000$$


$$x = 17.5 \text{ cm} \quad \text{W1}$$

		AVAILABLE MARKS
(ii)	$\uparrow : P + Q = 1600 \text{ m}$ Moments about A: $1600 \text{ m} \times 17.5 = Q \times 50$ $Q = 560 \text{ m}$ $P = 1040 \text{ m}$ $Q = \frac{7P}{13}$	MW1 M1 W1 W1 MW1 W1
		13

4	(i)		$\uparrow : T_1 = 3g$ $T_2 = 2g$	M1 W1
		$\frac{\lambda(5d - l)}{l} = 3g$ $\frac{5d - l}{3} = \frac{gl}{\lambda}$	$\frac{\lambda(4d - l)}{l} = 2g$ $\frac{4d - l}{2} = \frac{gl}{\lambda}$	M1 W1
		$2(5d - l) = 3(4d - l)$ $3l - 2l = 12d - 10d$ $l = 2d$		W1
		$\frac{4d - 2d}{2} = \frac{2gd}{\lambda}$ $\lambda = 2g$		W1
	(ii)	At K, energy = 0		
		At maximum distance $h$ below K energy = EPE + GPE		
		Conservation of energy: $\frac{2g(h - 2d)^2}{4d} + 2g \times (-h) = 0$ $(h - 2d)^2 - 4hd = 0$ $h^2 - 8hd + 4d^2 = 0$	M2 W2	W1
				12

5 (i)

AVAILABLE MARKS

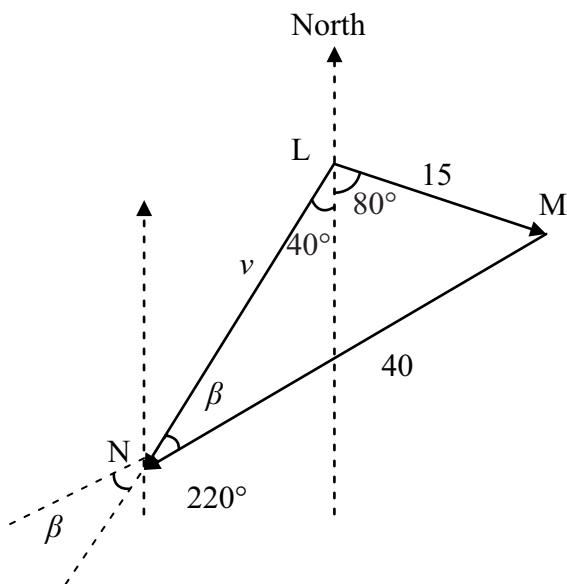LN is on a bearing of  $220^\circ$ 

LM is reverse velocity of B

M1

MN is velocity of C

MW1

$$\frac{\sin \beta}{15} = \frac{\sin 120^\circ}{40}$$

M1 W1

$$\sin \beta = 0.3248$$

$$\beta = 19.0^\circ$$

MW1

Bearing C should steer is  $220^\circ + \beta$ 

$$= 239^\circ$$

MW1

$$(ii) \frac{v}{\sin(180^\circ - 120^\circ - 19^\circ)} = \frac{40}{\sin 120^\circ}$$

M1

$$v = 30.3 \text{ km h}^{-1}$$

MW1

$$\text{Time taken} = \frac{25}{30.3} = 0.825 \text{ hours} = 49.5 \text{ min}$$

M1 W1

10

		AVAILABLE MARKS
6	(i) $\ddot{x} = -\omega^2 x$	M1
	$-9 = -\omega^2 \times 1$	
	$\omega = 3$	W1
	$T = \frac{2\pi}{\omega}$	M1
	$= \frac{2\pi}{3}$	W1
	$v^2 = \omega^2 (a^2 - x^2)$	M1
	$27 = 9 (a^2 - 1)$	W1
	$a = 2$	W1
(ii)	At A, $2\sin 3t = 1$ so $\sin 3t = \frac{1}{2}$	M1
	$3t = \frac{\pi}{6}, \frac{5\pi}{6}, \frac{13\pi}{6}, \dots$	
	$t = \frac{\pi}{18}, \frac{5\pi}{18}, \frac{13\pi}{18}, \dots$	W1
	Time interval = $\frac{13\pi}{18} - \frac{5\pi}{18} = \frac{4\pi}{9}$	M1 MW1
		11

			AVAILABLE MARKS
7	(i) $T = 2\pi\sqrt{\frac{l}{g}} = 2\pi\sqrt{\frac{0.4}{9.8}} = 1.269395 = 1.27$ (3 s.f.) s	MW1	
	(ii) Number of oscillations per day = $\frac{86400}{1.269395} = 68064$	MW1	
	(iii) New number of oscillations per day = 67564	MW1	
	New period = $T_1 = \frac{86400}{67564} = 1.278788$ s	MW1	
	New acceleration due to gravity = $g_1$ is given by		
	$2\pi\sqrt{\frac{l}{g_1}} = 1.278788$	M1	
	$g_1 = \frac{4\pi^2 \times 0.4}{1.278788^2} = 9.65657 \text{ ms}^{-2}$	W1	
	The adjusted length of the pendulum is $l_1$ , given by		
	$\frac{l_1}{g_1} = \frac{l}{g}$	M1	
	$l_1 = \frac{0.4 \times 9.65657}{9.8} = 0.394$ m	W1	8
		Total	75