



GCE MARKING SCHEME

SUMMER 2016

Mathematics – M2
0981/01

INTRODUCTION

This marking scheme was used by WJEC for the Summer 2016 examination. It was finalised after detailed discussion at examiners' conferences by all the examiners involved in the assessment. The conference was held shortly after the paper was taken so that reference could be made to the full range of candidates' responses, with photocopied scripts forming the basis of discussion. The aim of the conference was to ensure that the marking scheme was interpreted and applied in the same way by all examiners.

It is hoped that this information will be of assistance to centres but it is recognised at the same time that, without the benefit of participation in the examiners' conference, teachers may have different views on certain matters of detail or interpretation.

WJEC regrets that it cannot enter into any discussion or correspondence about this marking scheme.

GCE Mathematics - M2
Summer 2016 Mark Scheme

Q	Solution	Mark	Notes
1(a).	$x = \int 12t^2 - 7kt + 1 dt$ $x = 4t^3 - \frac{7k}{2}t^2 + t + (C)$ $t = 0, x = 3$ $C = 3$ $x = 4t^3 - \frac{7k}{2}t^2 + t + 3$ $t = 2, x = 16$ $16 = 32 - 14k + 2 + 3$ $k = \frac{3}{2}$	<p>M1</p> <p>A1</p> <p>m1</p> <p>m1</p> <p>A1</p>	<p>At least one power increased</p> <p>correct integration</p> <p>use of initial conditions</p> <p>values substituted</p> <p>cao</p>
1(b).	$a = \frac{dv}{dt}$ $a = 24t - 10.5$ $F = 4(24t - 10.5)$ <p>When $t = 5$</p> $F = 4(24 \times 5 - 10.5)$ $F = \underline{438 \text{ (N)}}$	<p>M1</p> <p>A1</p> <p>m1</p> <p>A1</p>	<p>At least one power decreased</p> <p>correct differentiation ft k. accept k</p> <p>$4xa$</p> <p>ft k. -ve values A0</p>

Q	Solution	Mark	Notes
2(a)	$u_H = 24.5\cos 30^\circ = (12.25\sqrt{3})$ $u_V = 24.5\sin 30^\circ = (12.25)$ $s = ut + 0.5at^2, s=0, u=12.25, a=(\pm)9.8$ $0 = 12.25t - 0.5 \times 9.8 \times t^2$ $t = \frac{12.25}{4.9}$ $t = 2.5$ Range = $2.5 \times 12.25\sqrt{3}$ Range = <u>53.04 (m)</u>	B1 B1 M1 A1 A1 A1	 oe complete method cao
2(b)	$v^2 = u^2 + 2as, v=0, u=12.25, a=(\pm)9.8$ $0 = 12.25^2 - 2 \times 9.8 \times s$ $s = \frac{7.65625}{1} = \underline{7.66 (m)}$	M1 A1 A1	oe complete method ft u_V answers rounding to 7.7 ISW
2(c)	Required speed is 24.5 ms^{-1} downwards at an angle of 30° to the horizontal.	B1	

Q	Solution	Mark	Notes
3	$\mathbf{r} = \mathbf{p} + t\mathbf{v}$ $\mathbf{r}_A = (1 + 2t)\mathbf{i} + 5t\mathbf{j} - 4t\mathbf{k}$ $\mathbf{r}_B = (3 + t)\mathbf{i} + 3t\mathbf{j} - 5t\mathbf{k}$	M1	used
	$\mathbf{r}_B - \mathbf{r}_A = (2 - t)\mathbf{i} - 2t\mathbf{j} - t\mathbf{k}$	A1	either correct, any form
	$AB^2 = x^2 + y^2 + z^2$ $AB^2 = (2 - t)^2 + 4t^2 + t^2$ $(AB^2 = 6t^2 - 4t + 4)$	M1 A1	cao
	Differentiate $\frac{dAB^2}{dt} = 2(2 - t)(-1) + 10t (= 12t - 4)$ $-4 + 2t + 10t = 0$ $t = \frac{1}{3}$	M1 m1 A1	at least 1 power reduced equating to 0. cao
	$(\text{least distance})^2 = (2 - \frac{1}{3})^2 + 5(\frac{1}{3})^2$ $\text{least distance} = \sqrt{\frac{10}{3}} = \underline{1.83 \text{ (m)}}$	A1	cao

Q	Solution	Mark	Notes
4(a)	<p>Conservation of momentum</p> $12 \times 600 = 1600 \times v$ $v = \frac{9}{2} \text{ (ms}^{-1}\text{)}$	M1 A1 A1	dimensionally correct allow -ve
4(b)	<p>Energy considerations</p> $E = 0.5 \times 12 \times 600^2 + 0.5 \times 1600 \times 4.5^2$ $E = 2160000 + 16200$ $E = \underline{2176200 \text{ (J)}}$ <p>Energy dissipated by eg sound of cannon firing ignored.</p>	M1 A1 A1 E1	both expressions correct, Ft v in (a) cao oe
4(c)	<p>Work-energy principle</p> $F \times d = E$ $F \times 1.2 = 16200$ $F = \underline{13500 \text{ (N)}}$	M1 A1	used cao

Q	Solution	Mark	Notes
5.	Hooke's Law	M1	used
	$30 = \frac{\lambda(0.95-l)}{l}$	A1	
	$70 = \frac{\lambda(1.15-l)}{l}$	A1	
	$\frac{70}{30} = \frac{(1.15-l)}{(0.95-l)}$	m1	getting to equation with 1 variable
	$7(0.95-l) = 3(1.15-l)$		
	$l = \underline{0.8}$	A1	cao
	$\lambda = \underline{160}$	A1	cao


Q	Solution	Mark	Notes
6(a)	$\mathbf{a} = \frac{dv}{dt}$ $\mathbf{a} = 14\cos 2t \mathbf{i} - 18\sin 3t \mathbf{j}$	M1 A1	sin to cos and coefficient multiplied
6(b)	$\mathbf{r} = \int 7\sin 2t \mathbf{i} + 6\cos 3t \mathbf{j} dt$ $\mathbf{r} = -3.5\cos 2t \mathbf{i} + 2\sin 3t \mathbf{j} + (\mathbf{c})$ $t = 0, \mathbf{r} = 0.5 \mathbf{i} + 3 \mathbf{j}$ $0.5 \mathbf{i} + 3 \mathbf{j} = -3.5 \mathbf{i} + \mathbf{c}$ $\mathbf{c} = 4 \mathbf{i} + 3 \mathbf{j}$ $\text{When } t = \frac{\pi}{2}$ $\mathbf{r} = -3.5\cos \pi \mathbf{i} + 2\sin \frac{3}{2} \pi \mathbf{j} + 4 \mathbf{i} + 3 \mathbf{j}$ $\mathbf{r} = (4 + 3.5) \mathbf{i} + (3 - 2) \mathbf{j}$ $\mathbf{r} = \underline{7.5 \mathbf{i} + \mathbf{j} \text{ (m)}}$	M1 A1 m1 m1 A1	sin to cos and coefficient divided. used substituted si cao
OR	$\int_0^{\pi/2} 7\sin 2t \mathbf{i} + 6\cos 3t \mathbf{j} dt$ $= [-3.5\cos 2t \mathbf{i} + 2\sin 3t \mathbf{j}]^{\pi/2}$ $= 3.5 \mathbf{i} - 2 \mathbf{j} + 3.5 \mathbf{i}$ $\mathbf{r} = 0.5 \mathbf{i} + 3 \mathbf{j} + 3.5 \mathbf{i} - 2 \mathbf{j} + 3.5 \mathbf{i}$ $\mathbf{r} = \underline{7.5 \mathbf{i} + \mathbf{j} \text{ (m)}}$	(M1) (A1) (m1) (m1) (A1)	attempt to integrate correct integration correct use of limits $0, \pi/2$ adding $0.5 \mathbf{i} + 3 \mathbf{j}$ cao

Q	Solution	Mark	Notes
7.	<p>K. Energy. at $A = 0.5 \times 70 \times v^2$ K. Energy. at $A = 35v^2$</p> <p>Let potential energy be 0 at A P. Energy at $B = 70 \times 9.8 \times (22 - 20)$ P. Energy at $B = 70 \times 9.8 \times 2$ P. Energy at $B = 1372$</p> <p>Minimum K. Energy at $B = 0$</p> <p>WD against resistance = 50×16 WD against resistance = 800</p> <p>Work-Energy Principle $35v^2 = 1372 + 800$ $v = \underline{7.88}$</p>	<p>B1</p> <p>M1 A1</p> <p>B1</p> <p>M1 A1 A1</p>	<p>mgh attempted correct for $h=2, 20, 22$</p> <p>at least 3 energies ft one arithmetic slip cao</p>

Q
8

Solution

Mark Notes

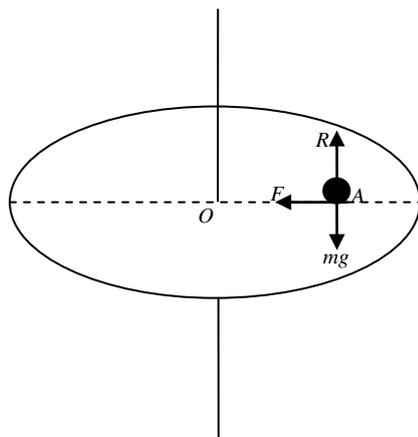

Resolve vertically $R = mg$

$$F = \mu R = 0.72mg$$

B1

B1 ft R , si

If particle remains at A

$$F \geq ma$$

M1

accept =, used,
No extra force

$$0.72mg \geq \frac{mv^2}{1.6}$$

A1

accept =

$$v^2 \leq 0.72 \times 9.8 \times 1.6$$

$$v \leq \underline{3.36}$$

Greatest value of v is 3.36

A1

cao, accept =

$$\omega \leq \frac{3.36}{1.6}$$

$$\omega \leq \underline{2.1 \text{ rads}^{-1}}$$

Greatest value of ω is 2.1 rads⁻¹

A1B1

accept =, ft v

Q	Solution	Mark	Notes
9(a)	Conservation of energy $0.5 \times m \times g + mg \times 4(1 - \cos \theta)$ $= 0.5 \times m \times v^2$ $g + 8g(1 - \cos \theta) = v^2$ $v^2 = \underline{g(9 - 8\cos \theta)}$	M1 A1 A1 A1	KE and PE KE both sides, oe correct equation, any form cao, simplified, ISW
9(b)	N2L towards centre of motion $mg\cos\theta - R = \frac{mv^2}{4}$ $R = mg\cos\theta - \frac{mg}{4}(9 - 8\cos \theta)$ $R = \underline{3mg(\cos\theta - 0.75)}$ <i>P</i> leaves the surface when $R=0$ $\cos\theta = \underline{0.75}$ $v^2 = \underline{g(9 - 8 \times 0.75)}$ $v^2 = \underline{3g} = \underline{29.4}$	M1 A1 m1 A1 M1 A1 A1	dim correct, 3 terms, <i>mg</i> cosθ and <i>R</i> opposing cao, any form ISW cao cao